


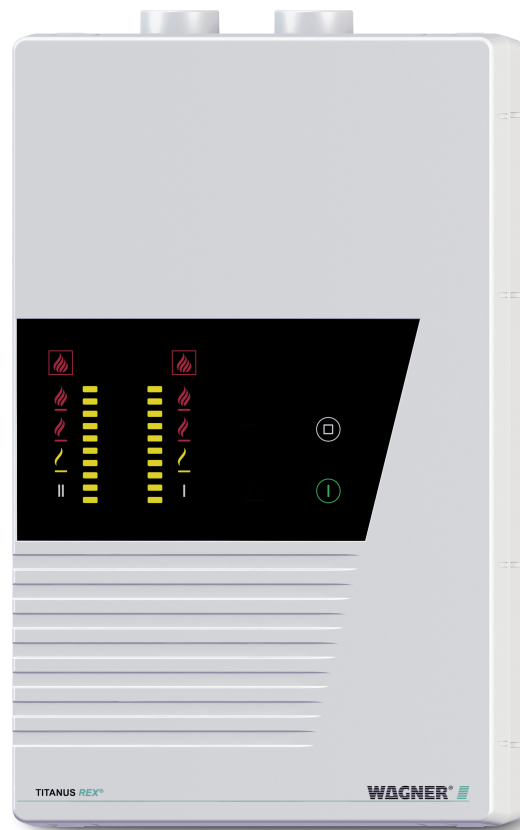

TITANUS REX® Aspirating Smoke Detector

More flexible, more responsive, simply smarter.
Next-generation fire detection.

Technology


The innovative TITANUS REX® aspirating smoke detector can actively monitor up to two areas independently of one another and provides highly sensitive monitoring with a very high level of immunity to nuisance alarms.

Thanks to state-of-the-art digital tools, project planning, commissioning, and maintenance can be carried out intuitively and efficiently. The system is designed for high-level accuracy with either wireless or wired operation of the detector.

Thanks to its modular design, TITANUS REX® can be optimally adapted to the requirements of each specific application. The detector thus also offers a high level of investment safety for installation and retrofitting.

Features

- Very early fire detection
- High level of immunity to nuisance alarms thanks to predictive *LOGIC-SENS® PLUS* fire pattern recognition
- Energy efficiency thanks to low power consumption starting at 90 mA
- Quiet operation starting at 23 dB(A)
- Suitable for use in very dusty areas and at temperatures as low as -25.6 °F (-32 °C)
- 4 alarm levels for a graduated alarm concept
- Can be connected to many fire alarm control panels via potential-free contacts
- Meets the functional cybersecurity requirements according to IEC 62443 3:3
- Wide range of accessories for optimal adaptation to the application area
- Very high quality standards, Made in Germany

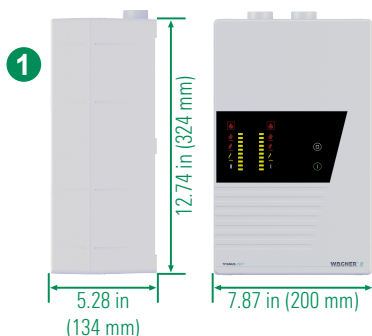

The aspirating smoke detector consists of the basic device ① and one or two detector modules (for separate channels) ②. Its functionality can be expanded using optional add-on modules.

Basic device		TX-70L-W	
No. of pipe connections	2 sampling pipes; 4 sampling pipes with adapter (plus 1 air return)		
Diameter of pipe connections	0.75 in 25 mm		
Max. no. of detector modules/sampling points	2	164 (2 x 82)	
Max. area of coverage	64,500 ft² (2 x 32,250 ft²) 6,000 m² (2 x 3,000 m²)		
Max. pipe length	1,970 ft (2 x 985 ft) 600 m (2 x 300 m)		
Alarm levels (per channel)	4 (info, pre-alarm, 1st main alarm, 2nd main alarm), freely programmable		
Supply voltage	24 V DC (14 to 30 V DC)		
Display (buttons, programmable)	fault, service, operation, purge; 4 alarms per channel (reset optional)		
Bar graph (smoke level display)	1 per channel		
Diagnostic port, wired	USB-C		
Interfaces	Ethernet (optional) ¹ , RS-485 (optional) ¹		
Event log	approx. 20,000 events + cybersecurity login history		
Current consumption at rest (24 V DC)	1 channel: from 90 mA	2 channels: from 115 mA	
Current consumption alarm (24 V DC)	1 channel: from 140 mA	2 channels: from 200 mA	
Sound pressure level at a distance of 3.28 ft (1 m)	from 23 dB(A)		
Operating temperature range	−25.6 ... +140 °F −32 ... +60 °C		
Weight (without detector modules)	3.31 lbs 1.50 kg		
Permissible relative humidity	10 ... 95% RH		
Housing material and color	plastics (ABS), papyrus white (RAL 9018)		
IP protection class	IP 54		
FACP connection, standard (max.)	4 potential-free contacts, programmable, expandable to up to 20		
Contact rating	1 A, 30 V, max. 24 W		
General inputs (GPI)	1 monitored (up to 5), 1 unmonitored		
No. of cable entries/terminal connections	6 x M20, 4 x M25	Relay contacts/GPI: max. AWG 16 1.5 mm²	
Pipe monitoring	monitoring for transmission paths with impaired performance		
Internal filter	2 per channel (15 ppi)		
Max. no. of slots for add-on modules	2 (expandable to 4)		
Detector module		TX-DM-01L	
Weight	approx. 7.05 oz (0.20 kg) per detector module		
Sensitivity range	0.0003 ... 6.575% obs/ft 0.001 ... 20% obs/m		
Sensitivity range main alarm	0.003 ... 6.575% obs/ft 0.01 ... 20% obs/m		

Approvals

UL 268, 8th edition. Additional approvals and certifications available upon request or at www.wagnergroup.com

Add-on modules

Relay module, type TX-RLM

¹ in preparation